

## ICS E1 - Inductive sensors for mobile equipment

# Sensors

# ICS E1 series

## Inductive sensors for mobile equipment

Mobile equipments is one of the most challenging applications ever for a sensor. Any device installed on a machinery being it a garbage truck, mobile crane, concrete mixer, tractor or fire truck, is subject to extreme operating conditions: from continuous exposure to high level of shocks and vibrations, wide temperature variations and voltage fluctuations, with voltage sags and peaks of up to 200 V, frequent high pressure and high temperature wash-down cycles and high electromagnetic interference.

ICS E1 inductive sensors have been developed, to survive these harsh environmental conditions and make you forget about them when installed on the vehicle, granting the highest uptime level of the machinery.



## Reliable detection in mobile equipment

ICS E1 sensors is a robust solution for daily outdoor operations and assures accurate and reliable detection of actuating parts such as hydraulic pistons, gears speed and position, cranes position and movement, on mobile work machines.

### Main features

- M12, M18 and M30 rugged stainless-steel housings available with 2m high-grade PUR cable or M12-plug
- Maximum electrical and mechanical flexibility with flush or non-flush versions and all output configurations: PNP, NPN, NO, NC
- High switching distances from 4 to 22 mm to allow a safe installation on the machine

### Extreme performance

- E1 type approval with an immunity to radiated interference of up to 200 V/m
- Integrated load dump protection to prevent voltage peaks on the on-board power supply
- Wide voltage supply range, from 8 to 60 VDC, to grant proper operation with any vehicle's battery condition
- 20 g vibration resistance, 100 g shock resistance and 40 g continuous shock resistance
- Extended operating temperature range from -40°C to +85°C
- IP68 and IP69K protection degree to avoid any water and moisture penetration during high pressure and high temperature washing cycles




## Main benefits



### E1-type approval

A rigorous certification for mobile equipment and automotive industries to allow operation on public roads. ICS E1 sensors, with an outstanding immunity to radiated interference of up to 200 V/m, set a new standard in the market for safe operation with presence of severe radiated interference typical of vehicle applications.




### Load dump protection

The onboard power supply of the sensor is fully protected against the damaging voltage surges that generally occur in case of a sudden battery disconnection, for a loose connection or corrosion, while the vehicle alternator is supplying charging current. Sensors have been tested according to DIN ISO 7637-2/SAE J1113-11 Pulse 1, 2a, 2b, 3a, 3b, 4, 5a.




### 8 to 60 VDC

The wide voltage supply range grants a reliable operation of the sensor in any vehicle's battery conditions, compensating the typical high fluctuations such as voltage sags with discharging batteries, increased voltage during charging or voltage peaks when switching higher electrical loads such as hydraulic pumps.



### -40°C to +85°C

ICS E1 sensors have been designed with over specified components to operate reliably even with extreme outdoor conditions or when installed next to hot engines or exhaust systems.



### Extreme mechanical durability

Robust stainless steel housings with excellent resistance to corrosive road salt chemicals, increased shock and vibrations resistance, and IP69K design to avoid any water and moisture penetration during periodic high temperature and high pressure cleaning cycles to remove oil, dust, grease and soils accumulated during daily operation.



### Plug & play solutions

On request, also pigtail solutions with preassembled cables and rugged connectors typical of mobile equipment, such as Deutsch, Packard and Molex, are available for increased flexibility in the installation and plug & play reliable operation.



# ICS E1 series

## Inductive sensors for mobile equipment

### Applications

#### Garbage trucks



#### Mobile cranes



#### Fire trucks



#### Earth-moving equipment



#### Buses



#### Agriculture machines



#### Concrete mixers



#### Forklifts



### Sensors

CARLO GAVAZZI Automation Components. Specifications are subject to change without notice. Illustrations are for example only.

**E1**  
type approval



**200 V/m**  
high immunity  
ISO 11452-2



**100 g** shock  
**40 g** continuous  
shock resistance




**Installation flexibility**  
PUR cable or M12 plug







**Load dump**  
protection



**8 - 60 VDC**  
wide supply voltage

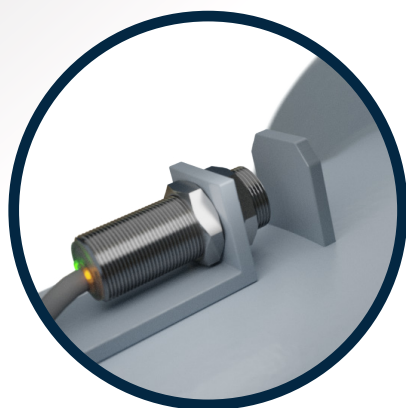

**IP68, IP69K**  
protection degree



**-40°C to +85°C**  
extended temperature range



### ICS12 E1 series (3-wire DC)

Housing dimension		M12		
Material		Stainless steel AISI 304 housing		
Rated operational voltage		8 to 60 VDC		
Switching frequency		≤ 1300 Hz	≤ 1000 Hz	
Rated operating distance, Sn		4 mm	8 mm	
Installation type		Flush	Non-flush	
2m PUR cable	NPN	NO	<b>ICS12L50F04NOB2E1</b>	<b>ICS12L50N08NOB2E1</b>
		NC	<b>ICS12L50F04NCB2E1</b>	<b>ICS12L50N08NCB2E1</b>
	PNP	NO	<b>ICS12L50F04POB2E1</b>	<b>ICS12L50N08POB2E1</b>
		NC	<b>ICS12L50F04PCB2E1</b>	<b>ICS12L50N08PCB2E1</b>
M12 - Plug	NPN	NO	<b>ICS12L50F04NOM1E1</b>	<b>ICS12L50N08NOM1E1</b>
		NC	<b>ICS12L50F04NCM1E1</b>	<b>ICS12L50N08NCM1E1</b>
	PNP	NO	<b>ICS12L50F04POM1E1</b>	<b>ICS12L50N08POM1E1</b>
		NC	<b>ICS12L50F04PCM1E1</b>	<b>ICS12L50N08PCM1E1</b>

### ICS18 E1 series (3-wire DC)

Housing dimension		M18		
Material		Stainless steel AISI 304 housing		
Rated operational voltage		8 to 60 VDC		
Switching frequency		≤ 900 Hz		
Rated operating distance, Sn		8 mm	14 mm	
Installation type		Flush	Non-flush	
2m PUR cable	NPN	NO	<b>ICS18L50F08NOB2E1</b>	<b>ICS18L50N14NOB2E1</b>
		NC	<b>ICS18L50F08NCB2E1</b>	<b>ICS18L50N14NCB2E1</b>
	PNP	NO	<b>ICS18L50F08POB2E1</b>	<b>ICS18L50N14POB2E1</b>
		NC	<b>ICS18L50F08PCB2E1</b>	<b>ICS18L50N14PCB2E1</b>
M12 - Plug	NPN	NO	<b>ICS18L50F08NOM1E1</b>	<b>ICS18L50N14NOM1E1</b>
		NC	<b>ICS18L50F08NCM1E1</b>	<b>ICS18L50N14NCM1E1</b>
	PNP	NO	<b>ICS18L50F08POM1E1</b>	<b>ICS18L50N14POM1E1</b>
		NC	<b>ICS18L50F08PCM1E1</b>	<b>ICS18L50N14PCM1E1</b>

### ICS30 E1 series (3-wire DC)

Housing dimension		M30		
Material		Stainless steel AISI 304 housing		
Rated operational voltage		8 to 60 VDC		
Switching frequency		≤ 300 Hz		
Rated operating distance, Sn		15 mm	22 mm	
Installation type		Flush	Non-flush	
2m PUR cable	NPN	NO	<b>ICS30L50F15NOB2E1</b>	<b>ICS30L50N22NOB2E1</b>
		NC	<b>ICS30L50F15NCB2E1</b>	<b>ICS30L50N22NCB2E1</b>
	PNP	NO	<b>ICS30L50F15POB2E1</b>	<b>ICS30L50N22POB2E1</b>
		NC	<b>ICS30L50F15PCB2E1</b>	<b>ICS30L50N22PCB2E1</b>
M12 - Plug	NPN	NO	<b>ICS30L50F15NOM1E1</b>	<b>ICS30L50N22NOM1E1</b>
		NC	<b>ICS30L50F15NCM1E1</b>	<b>ICS30L50N22NCM1E1</b>
	PNP	NO	<b>ICS30L50F15POM1E1</b>	<b>ICS30L50N22POM1E1</b>
		NC	<b>ICS30L50F15PCM1E1</b>	<b>ICS30L50N22PCM1E1</b>

## OUR SALES NETWORK IN EUROPE

### AUSTRIA

Carlo Gavazzi GmbH  
Ketzergasse 374,  
A-1230 Wien  
Tel: +43 1 888 4112  
Fax: +43 1 889 10 53  
office@carlogavazzi.at

### BELGIUM

Carlo Gavazzi NV/SA  
Mechelsesteenweg 311,  
B-1800 Vilvoorde  
Tel: +32 2 257 4120  
sales@carlogavazzi.be

### DENMARK

Carlo Gavazzi Handel A/S  
Over Hadstenvej 40,  
DK-8370 Hadsten  
Tel: +45 89 60 6100  
Fax: +45 86 98 15 30  
handel@gavazzi.dk

### FINLAND

Carlo Gavazzi OY AB  
Ahventie, 4 B  
FI-02170 Espoo  
Tel: +358 9 756 2000  
myynti@gavazzi.fi

### FRANCE

Carlo Gavazzi Sarl  
Zac de Paris Nord II, 69, rue de la Belle Etoile,  
F-95956 Roissy CDG Cedex  
Tel: +33 1 49 38 98 60  
Fax: +33 1 48 63 27 43  
french.team@carlogavazzi.fr

### GERMANY

Carlo Gavazzi GmbH  
Pfnorstr. 10-14  
D-64293 Darmstadt  
Tel: +49 6151 81000  
Fax: +49 6151 81 00 40  
info@gavazzi.de

### GREAT BRITAIN

Carlo Gavazzi UK Ltd  
4.4 Frimley Business Park,  
Frimley, Camberley, Surrey GU16 7SG  
Tel: +44 1 276 854 110  
Fax: +44 1 276 682 140  
sales@carlogavazzi.co.uk

### ITALY

Carlo Gavazzi SpA  
Via Milano 13,  
I-20045 Lainate  
Tel: +39 02 931 761  
Fax: +39 02 931 763 01  
info@gavazziacbu.it

### NETHERLANDS

Carlo Gavazzi BV  
Wijkermeerweg 23,  
NL-1948 NT Beverwijk  
Tel: +31 251 22 9345  
Fax: +31 251 22 60 55  
info@carlogavazzi.nl

### NORWAY

Carlo Gavazzi AS  
Melkeveien 13,  
N-3919 Porsgrunn  
Tel: +47 35 93 0800  
Fax: +47 35 93 08 01  
post@gavazzi.no

### PORTUGAL

Carlo Gavazzi Lda  
Rua dos Jerónimos 38-B,  
P-1400-212 Lisboa  
Tel: +351 21 361 7060  
Fax: +351 21 362 13 73  
carlogavazzi@carlogavazzi.pt

### SPAIN

Carlo Gavazzi SA  
Avda. Iparraguirre, 80-82,  
E-48940 Leioa (Bizkaia)  
Tel: +34 94 480 4037  
Fax: +34 94 431 6081  
gavazzi@gavazzi.es

### SWEDEN

Carlo Gavazzi AB  
V:a Kyrkogatan 1,  
S-652 24 Karlstad  
Tel: +46 54 85 11 25  
Fax: +46 54 85 11 77  
info@carlogavazzi.se

### SWITZERLAND

Carlo Gavazzi AG  
Verkauf Schweiz/Vente Suisse  
Sumpfstrasse 3,  
CH-6312 Steinhausen  
Tel: +41 41 747 4535  
Fax: +41 41 740 45 40  
info@carlogavazzi.ch

## OUR SALES NETWORK IN THE AMERICAS

### USA

Carlo Gavazzi Inc.  
750 Hastings Lane,  
Buffalo Grove, IL 60089, USA  
Tel: +1 847 465 6100  
Fax: +1 847 465 7373  
sales@carlogavazzi.com

### CANADA

Carlo Gavazzi Inc.  
2660 Meadowvale Boulevard,  
Mississauga, ON L5N 6M6, Canada  
Tel: +1 905 542 0979  
Fax: +1 905 542 22 48  
gavazzi@carlogavazzi.com

### MEXICO

Carlo Gavazzi Mexico S.A. de C.V.  
Circuito Puericultores 22, Ciudad Satelite  
Naucalpan de Juarez, Edo Mex. CP 53100  
Mexico  
T +52 55 5373 7042  
F +52 55 5373 7042  
mexicosales@carlogavazzi.com

### BRAZIL

Carlo Gavazzi Automação Ltda.  
Av. Francisco Matarazzo, 1752  
Conj 2108 - Barra Funda - São Paulo/SP  
Tel: +55 11 3052 0832  
Fax: +55 11 3057 1753  
info@carlogavazzi.com.br

## OUR SALES NETWORK IN ASIA AND PACIFIC

### SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.  
61 Tai Seng Avenue #05-06  
Print Media Hub @ Paya Lebar iPark  
Singapore 534167  
Tel: +65 67 466 990  
Fax: +65 67 461 980  
info@carlogavazzi.com.sg

### MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.  
D12-06-G, Block D12,  
Pusat Perdagangan Dana 1,  
Jalan PJU 1A/46, 47301 Petaling Jaya,  
Selangor, Malaysia.  
Tel: +60 3 7842 7299  
Fax: +60 3 7842 7399  
sales@gavazzi-asia.com

### CHINA

Carlo Gavazzi Automation  
(China) Co. Ltd.  
Unit 2308, 23/F.,  
News Building, Block 1, 1002  
Middle Shennan Zhong Road,  
Shenzhen, China  
Tel: +86 755 83699500  
Fax: +86 755 83699300  
sales@carlogavazzi.cn

### HONG KONG

Carlo Gavazzi Automation  
Hong Kong Ltd.  
Unit No. 16 on 25<sup>th</sup> Floor, One Midtown,  
No. 11 Hoi Shing Road, Tsuen Wan,  
New Territories, Hong Kong  
Tel: +852 26261332 / 26261333  
Fax: +852 26261316

### TAIWAN

Branch of Carlo Gavazzi Automation  
Singapore Pte. Ltd.  
22F-1, No. 500 Shinzheng Rd,  
Xitun Dist, Taichung City,  
Taiwan, China  
Tel. +886 4 2258 4001  
Fax +886 4 22584 4002

## OUR COMPETENCE CENTRES AND PRODUCTION SITES

### DENMARK

Carlo Gavazzi Industri A/S  
Hadsten

### MALTA

Carlo Gavazzi Ltd  
Zejtun

### ITALY

Carlo Gavazzi Controls SpA  
Belluno

### LITHUANIA

Uab Carlo Gavazzi Industri Kaunas  
Kaunas

### CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.  
Kunshan

## HEADQUARTERS

Carlo Gavazzi Automation SpA  
Via Milano, 13  
I-20045 - Lainate (MI) - ITALY  
Tel: +39 02 931 761  
info@gavazziautomation.com

*Energy to Components!*

www.gavazziautomation.com